

Networks Simulation

Corso di Tecnologie di Infrastrutture di Reti

Carlo Augusto Grazia

Department of Engineering *Enzo Ferrari*
University of Modena and Reggio Emilia




UNIVERSITÀ DEGLI STUDI
DI MODENA E REGGIO EMILIA

Modena, 26 March 2014

- Motivations
 - What is Simulation
 - Why is it important?
 - What is Emulation
- Different Simulators
 - Why ns-3 is better?
- Inside ns-3
- Demo/Tutorial

Simulation in a nutshell

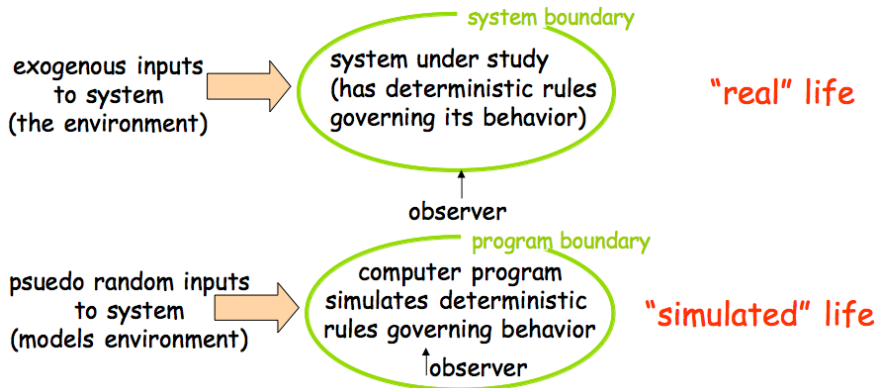

Why simulation

- Real-system not *available*:
 - complexity (e.g. huge networks);
 - cost (e.g. space communications, satellite);
 - dangerous (e.g. PPDR systems, emergency networks).
- Quick *alternatives* evaluation:
 - star/mesh topology;
 - TCP or UDP for an App;
 - WiMAX or LTE connection;
 - ...
- Evaluate *complex* analytical models (optimal formula unavailable):
 - different QoS solutions;
 - optimizations routing problem for WSN;
 - channel access techniques for challenging environment;
 - ...

Simulation: Pros and Cons

- Pros
 - cheaper: quite always;
 - find bugs in advance;
 - generality: over numerical techniques, over topology, ...;
 - detail: tuning the granularity system detail.
- Cons
 - accuracy: does the system reflects reality?;
 - large scale system: lot of resources to simulation;
 - may be slow: (computationally expensive, 1 min real time could be hours of simulated time).

What's in a simulation program?

- ***simulated time***: internal variable that keeps track of simulated time (could be faster or slower than real time);
- ***system "state"***: variables maintained by simulation program define system "stat" (e.g. track number of packets in queues, current value of TX timer, ...);
- ***events***: points in the time when system changes state:
 - each event has associate *event time* (e.g. enqueue/dequeue event, state changes, ...);
 - model for time between events (probabilistic) caused by external environment.

Simulation structure:

- simulation program maintains and updates list of future events: the *event list*;
- well defined set of events;
- for each event there is a simulated system action, an update of the event list.

Inside Simulation: A formal view

$$\text{simulation} : (\mathcal{S}, \mathcal{E}^n) \xrightarrow{f} (\mathcal{S}, \mathcal{E}^m)$$

where:

\mathcal{S} is the *state* space;

\mathcal{E} is the *event* space;

$\mathcal{E}^n = \{ (e_1, e_2, \dots, e_n) \mid e_i \in \mathcal{E}, \forall i \in [1, n] \}$.

$$\text{simulation}_{\text{step}} : ((e_1, \dots, e_n), s) \mapsto ((e_2, \dots, e_n) \cup (e'_1, \dots, e'_m), s')$$

where:

$(e_1, \dots, e_n) \in \mathcal{E}^n$ in the current list of event of the system;

$s \in \mathcal{S}$ is the current system state;

$(e_2, \dots, e_n) \cup (e'_1, \dots, e'_m) \in \mathcal{E}^{n+m-1}$ is the new event list of the system;

$s' \in \mathcal{S}$ is the new system state.

Emulator is an hw/sw that duplicates the functions of one computer system, so that the emulated behavior closely resembles the behavior of the real system.

- Common in gaming (Nintendo game over PC ...);
- A simulation 2.0;
- Real packets over simulated network;
- Simulated packets over real network.

Models of a Simulator

A list of common models “modeled” by a network simulator ...
... **what is a network!?**

Models of a Simulator

A list of common models “modeled” by a network simulator ...
... **what is a network!?**

- Nodes

- Links

Models of a Simulator

A list of common models “modeled” by a network simulator ...
... **what is a network!?**

- **Nodes**

- End-system (host)
- Router
- Hub ...

- **Links**

- Ethernet
- Point-to-Point
- Wireless ...

• Applications

- Bulk TCP transfer (very common)
- TCP/UDP “on-off” application
- Web Browsing
- P2P file transfert
- Video streaming
- VoIP
- Chat ...

• Protocols

- TCP vs UDP
- IPv4 vs IPv6
- Routing Protocol (BGP, OSPF, ...)

- **Network Interfaces**
 - Wired/Wireless
 - Layer 2 protocol (802.x family)
- **Packets**
 - Real data vs “Dummy”
- **Routers and Queueing**
 - I/O buffers
 - Route lookup delays
 - Routing table representation
 - Queueing techniques

Output of a Simulator

How to analyze the simulation results?

- **Trace file**

- Log packet receipt/transmit
- Log queue size, drop ...

- **Built-in statistics gathering**

- Link utilization
- Queue occupancy
- Throughput
- Loss rate

- **Custom Tracing**

- User specifies which packets/links/nodes to trace

Who is the best?

- **ns2**
 - Original “design” by Steve McCanne
 - OTcL/C++ hybrid
 - open source
 - De-facto standard in academic research (last decade)
- **Georgia Tech Network Simulator (GTNetS)**
 - Completely C++
 - Designed for distributed simulation (scalable)
 - BGP model

- **OPNET**

- Commercial, closed source tool
- De-facto standard in Military (cash!)
- Full-Featured, nice GUI
- Fine-grained data analysis feature

- **QualNet**

- Commercial, closed source tool
- Competes primarily with OPNET
- Strong in Wireless models

- **SSFNet**
 - Both Java and C++ versions
 - Designed for “parallel” simulations (multiCore, not distributed)
- **OMNet++**
 - C++ engine
 - Common in European Community

Network Simulator 3

discrete-event network simulator for
Internet systems



- Partially founded by US NSF grant
- Large Community (Investigators, Programmer, Staff, Volunteers)
- Modular and Scalable software
- Abstraction and Realism (Accurate!)
- Integration, between emulation
- Lot of Modules (WiFi, cellular, ...)
- Education (examples, tutorials, projects, courses)
- Maintenance (validations, documentation, distribution)




- Flexible event scheduler
- Output traces in ascii or Pcap (readable with WireShark)
- Emulation mode
 - Integration with real networks or real packets
 - Real-Time Scheduler
- Doxygen documentation
- Mercurial code repo




- Use of “smart pointers” to ease memory management
- Use of “Object Aggregation” to allow easy object extension functionality
- Simulation event scheduling on arbitrary functions with arbitrary argument lists
- Packet objects manage sequential array (easy add/remove headers or data)

ns3 basic model

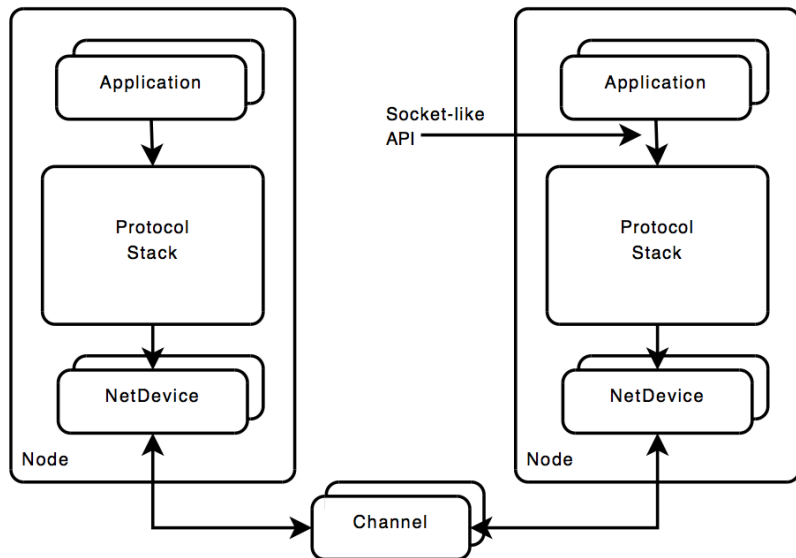

ns3 protocol stack

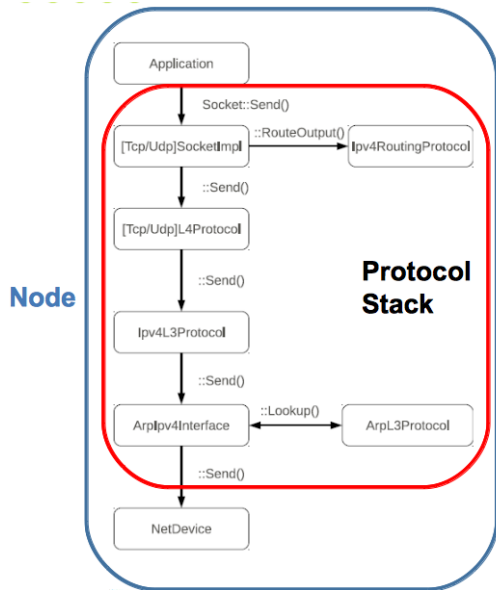

Protocol stack encapsulates:


- TCP sockets
- transport protocol
- network protocol
- routing
- ...

ns3 current modules

aodv	applications	bridge
click	config-store	core
csma	dama	dsv
emu	energy	flow-monitor
internet	lte	mesh
mobility	mpi	netanim
network	nix-vector-routing	olsr
openflow	point-to-point	point-to-point-layout
propagation	spectrum	stats
tap-bridge	test	tools
topology-read	uan	virtual-net-device
visualizer	wifi	wimax


ns3 emulation 1/2

- Stack : *real*
- Network : *simulated*

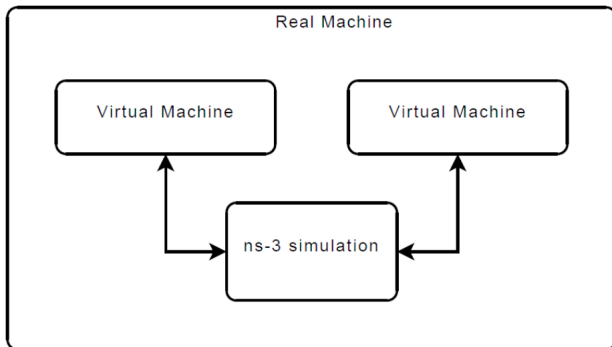


ns3 emulation 2/2

- Stack : *simulated*
- Network : *real*

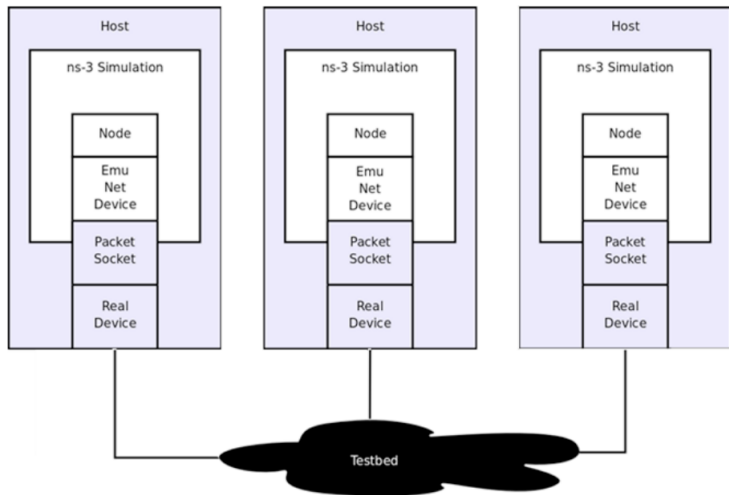


ns3 time performance

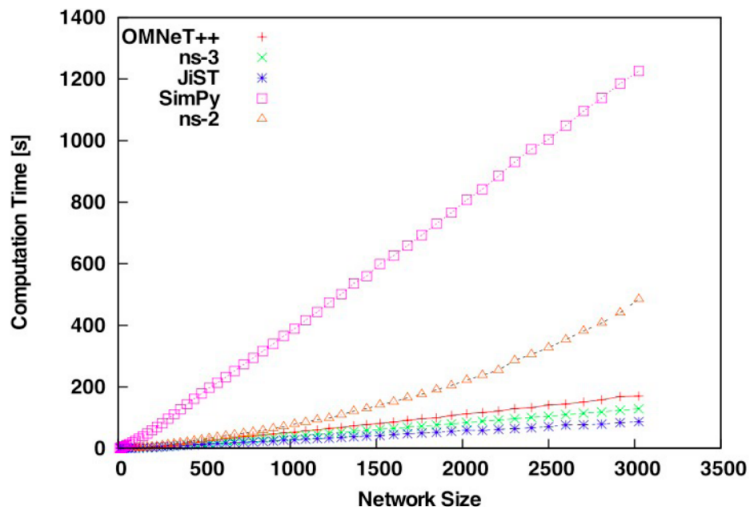


E. Weingärtner, H. Lehn, and K. Wehrle, "A performance comparison of recent network simulators", *IEEE ICC*, 2009.

ns3 memory performance

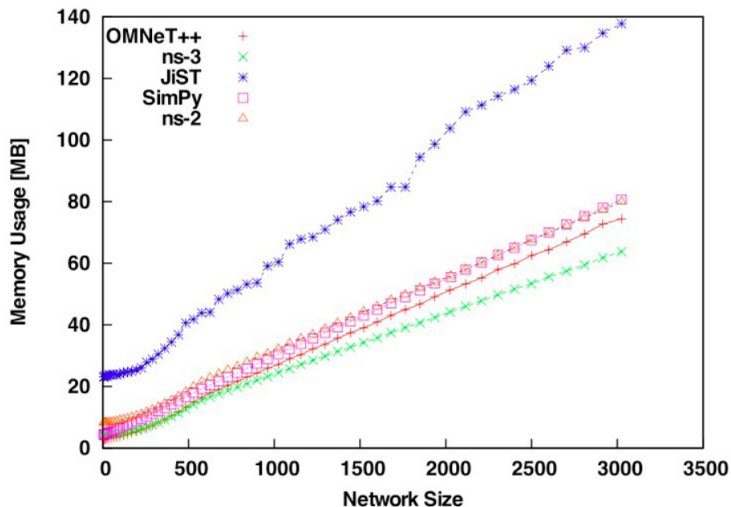

E. Weingärtner, H. Lehn, and K. Wehrle, "A performance comparison of recent network simulators", *IEEE ICC*, 2009.

ns3 code evolution

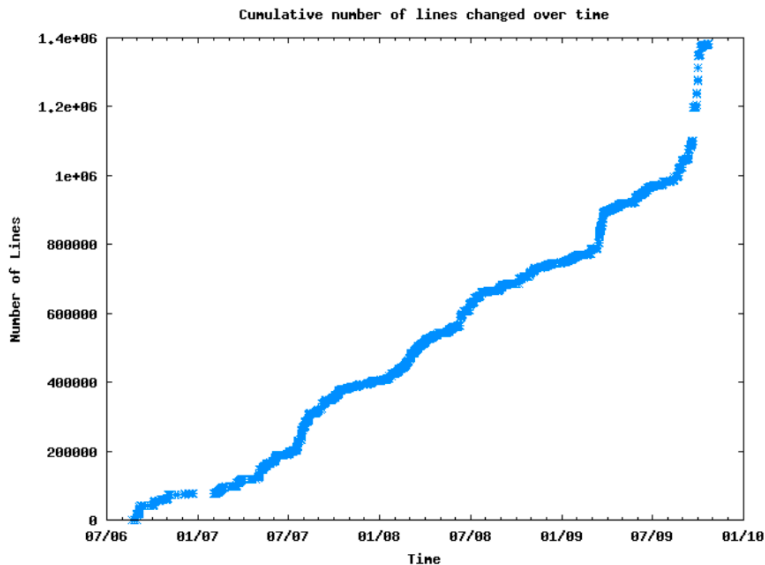

Numbers about ns3

- Line of code: $\sim 300k$
- Downloads: $> 50k$;
- Subscribed users: $> 3.5k$;
- Developers: $> 1k$;
- Citations: $> 100k$

Citations about ns2/ns3

- ns2/ns3 became the main choice for research usage. Source: ACM Digital Library:

	ns2	OPNET	QualNet
\geq layer 4	123 (75%)	30 (18%)	11 (7%)
= layer 3	186 (70%)	48 (18%)	31 (12%)
\leq layer 2	114 (43%)	96 (36%)	55 (21%)

- nowadays ns3 moves also conferences, workshops, tutorials and GSoC;
- ns3 is currently the standard *de-facto* for research purposes.



Tutorial on ns3

Install and Execute

Install ns3

On Ubuntu:


```
$ wget http://www.nsnam.org/releases/ns-allinone-3.19.tar.bz2
$ tar xjf ns-allinone-3.19.tar.bz2
$ cd ns-allinone-3.19
$ ./build
$ cd ns-3-dev
$ ./waf --run first
```

On Mac OSx

```
$ wget http://www.nsnam.org/releases/ns-allinone-3.19.tar.bz2
$ tar xjf ns-allinone-3.19.tar.bz2
$ cd ns-allinone-3.19/ns-3.19
$ ./waf configure --enable-examples
$ ./waf
```

Run first example: TCP Bulk

Draft of the example:




How to run it?

```
$ ./waf --run "tcp-bulk-send --tracing"  
$  
$ cat tcp-bulk-send.tr  
$ tcpdump -tt -r tcp-bulk-send-0-0.pcap  
$ wireshark tcp-bulk-send-0-0.pcap
```

Learn from first example: TCP Bulk

The goal is:



Learn from first example: TCP Bulk

Step 0 header and main:

```
#include <string>
#include <fstream>
#include "ns3/core-module.h"
#include "ns3/point-to-point-module.h"
#include "ns3/internet-module.h"
#include "ns3/applications-module.h"
#include "ns3/network-module.h"
#include "ns3/packet-sink.h"

using namespace ns3;

NS_LOG_COMPONENT_DEFINE ("TcpBulkSendExample");

int
main (int argc, char *argv[])
{

    bool tracing = false;
    uint32_t maxBytes = 0;
```

Learn from first example: TCP Bulk


Step 1 create the nodes:



```
//  
// Explicitly create the nodes required by the topology (shown  
// above).  
//  
NS_LOG_INFO ("Create nodes.");  
NodeContainer nodes;  
nodes.Create (2);
```

Learn from first example: TCP Bulk


Step 2 create the link:



```
NS_LOG_INFO ("Create channels.");  
//  
// Explicitly create the point-to-point link required by the  
// topology (shown above).  
//  
PointToPointHelper pointToPoint;  
pointToPoint.SetDeviceAttribute ("DataRate", StringValue  
    ("10Mbps"));  
pointToPoint.SetChannelAttribute ("Delay", StringValue ("20ms"));
```

Learn from first example: TCP Bulk


Step 3 connect nodes and link:



```
NetDeviceContainer devices;  
devices = pointToPoint.Install (nodes);  
//  
// Install the internet stack on the nodes  
//  
InternetStackHelper internet;  
internet.Install (nodes);
```

Learn from first example: TCP Bulk


Step 4 configure the network:



```
//  
// We've got the "hardware" in place. Now we need to add IP  
// addresses.  
//  
NS_LOG_INFO ("Assign IP Addresses.");  
Ipv4AddressHelper ipv4;  
ipv4.SetBase ("10.1.1.0", "255.255.255.0");  
Ipv4InterfaceContainer i = ipv4.Assign (devices);
```


Learn from first example: TCP Bulk


Step 5 create the application:



```
NS_LOG_INFO ("Create Applications.");  
//  
// Create a BulkSendApplication and install it on node 0  
//  
uint16_t port = 9; // well-known echo port number  
BulkSendHelper source ("ns3::TcpSocketFactory",  
                       InetAddress (i.GetAddress (1),  
                                   port));  
// Set the amount of data to send in bytes. Zero is unlimited.  
source.SetAttribute ("MaxBytes", UintegerValue (maxBytes));  
ApplicationContainer sourceApps = source.Install (nodes.Get (0));  
sourceApps.Start (Seconds (0.0));  
sourceApps.Stop (Seconds (5.0));
```

Learn from first example: TCP Bulk


Step 6 create the receiver socket:



```
//  
// Create a PacketSinkApplication and install it on node 1  
//  
PacketSinkHelper sink ("ns3::TcpSocketFactory",  
                       InetSocketAddress (Ipv4Address::GetAny  
                                           (), port));  
ApplicationContainer sinkApps = sink.Install (nodes.Get (1));  
sinkApps.Start (Seconds (0.0));  
sinkApps.Stop (Seconds (5.0));
```

Learn from first example: TCP Bulk


Step 7 set up tracing:



```
//  
// Set up tracing if enabled  
//  
if (tracing)  
{  
    AsciiTraceHelper ascii;  
    pointToPoint.EnableAsciiAll (ascii.CreateFileStream  
        ("tcp-bulk-send.tr"));  
    pointToPoint.EnablePcapAll ("tcp-bulk-send", false);  
}
```

Learn from first example: TCP Bulk


Step 8 actual simulation:

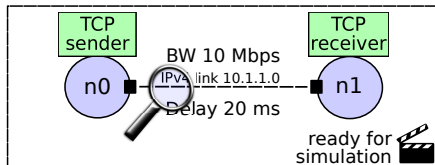

```
//  
// Now, do the actual simulation.  
//  
NS_LOG_INFO ("Run Simulation.");  
Simulator::Stop (Seconds (10.0));  
Simulator::Run ();  
Simulator::Destroy ();  
NS_LOG_INFO ("Done.");
```


Demo on TCP Bulk

Pcap analysis of TCP Bulk example with WireShark:

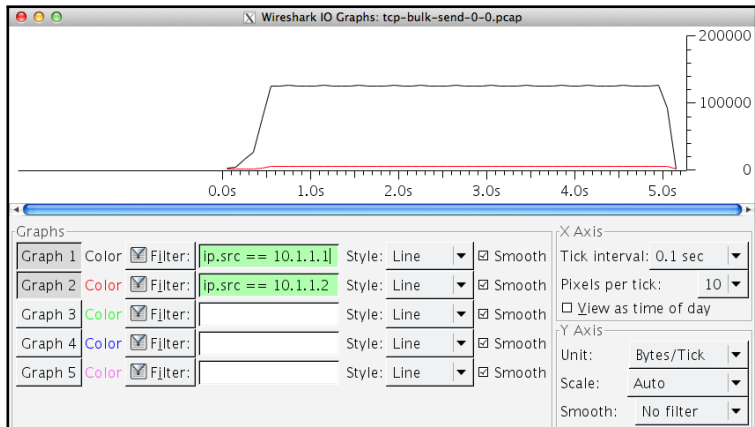

Run second example: Global Routing

Draft of the example:

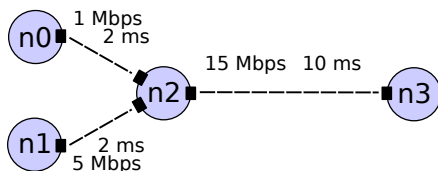


How to run it?

```
$ ./waf --run simple-global-routing
$
$ cat simple-global-routing.tr
$ tcpdump -tt -r simple-global-routing-2-3.pcap
$ wireshark simple-global-routing-2-3.pcap
```


Learn from second example: Global Routing

The goal is:

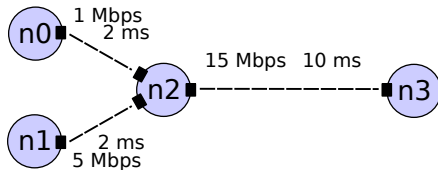

Learn from second example: Global Routing

Step 1 create the nodes:




```
// Here, we will explicitly create four nodes. In more
// sophisticated
// topologies, we could configure a node factory.
NS_LOG_INFO ("Create nodes.");
NodeContainer c;
c.Create (4);
NodeContainer n0n2 = NodeContainer (c.Get (0), c.Get (2));
NodeContainer n1n2 = NodeContainer (c.Get (1), c.Get (2));
NodeContainer n3n2 = NodeContainer (c.Get (3), c.Get (2));

InternetStackHelper internet;
internet.Install (c);
```


Learn from second example: Global Routing

Step 2 create the link:

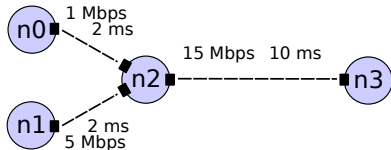


```
// We create the channels first without any IP addressing
information
NS_LOG_INFO ("Create channels.");
PointToPointHelper p2p;
p2p.SetDeviceAttribute ("DataRate", StringValue ("1Mbps"));
p2p.SetChannelAttribute ("Delay", StringValue ("2ms"));
NetDeviceContainer d0d2 = p2p.Install (n0n2);

p2p.SetDeviceAttribute ("DataRate", StringValue ("5Mbps"));
NetDeviceContainer d1d2 = p2p.Install (n1n2);

p2p.SetDeviceAttribute ("DataRate", StringValue ("15Mbps"));
p2p.SetChannelAttribute ("Delay", StringValue ("10ms"));
NetDeviceContainer d3d2 = p2p.Install (n3n2);
```

Learn from second example: Global Routing

Step 3 configure the network:

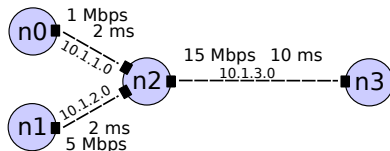

```
// Later, we add IP addresses.
NS_LOG_INFO ("Assign IP Addresses.");
Ipv4AddressHelper ipv4;
ipv4.SetBase ("10.1.1.0", "255.255.255.0");
Ipv4InterfaceContainer i0i2 = ipv4.Assign (d0d2);


ipv4.SetBase ("10.1.2.0", "255.255.255.0");
Ipv4InterfaceContainer i1i2 = ipv4.Assign (d1d2);

ipv4.SetBase ("10.1.3.0", "255.255.255.0");
Ipv4InterfaceContainer i3i2 = ipv4.Assign (d3d2);

// Create router nodes, initialize routing database and set up
// the routing
// tables in the nodes.
Ipv4GlobalRoutingHelper::PopulateRoutingTables ();
```

Learn from second example: Global Routing


Step 4 create first app sender:

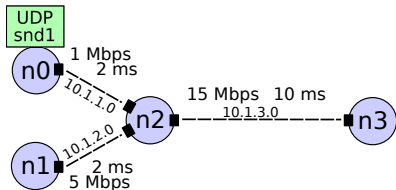

```
// Create the OnOff application to send UDP datagrams of size
// 210 bytes at a rate of 1 Mb/s
NS_LOG_INFO ("Create Applications.");
uint16_t port = 9; // Discard port (RFC 863)
OnOffHelper onoff ("ns3::UdpSocketFactory",
                  Address (InetSocketAddress (i3i2.GetAddress
                  (0), port)));
onoff.SetConstantRate (DataRate ("1Mb/s"));
ApplicationContainer apps = onoff.Install (c.Get (0));
apps.Start (Seconds (1.0));
apps.Stop (Seconds (10.0));
```

Learn from second example: Global Routing


Step 5 create first app receiver:

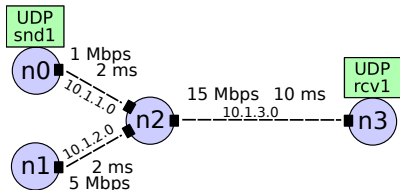

```
// Create a packet sink to receive these packets
PacketSinkHelper sink ("ns3::UdpSocketFactory",
    Address (InetSocketAddress
        (Ipv4Address::GetAny (), port)));
apps = sink.Install (c.Get (3));
apps.Start (Seconds (1.0));
apps.Stop (Seconds (10.0));
```

Learn from second example: Global Routing


Step 6 create second app sender:

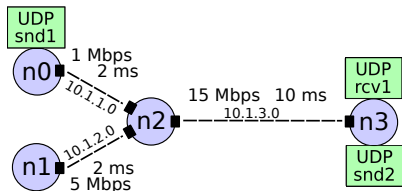

```
// Create a similar flow from n3 to n1, starting at time 1.1
seconds
onoff.SetAttribute ("Remote",
                  AddressValue (InetSocketAddress
                                (i1i2.GetAddress (0), port)));
onoff.SetConstantRate (DataRate ("5Mb/s"));
apps = onoff.Install (c.Get (3));
apps.Start (Seconds (1.1));
apps.Stop (Seconds (10.0));
```

Learn from second example: Global Routing


Step 7 create second app receiver:

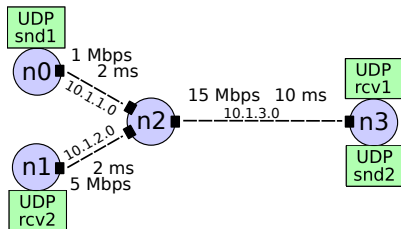

```
// Create a packet sink to receive these packets
apps = sink.Install (c.Get (1));
apps.Start (Seconds (1.1));
apps.Stop (Seconds (10.0));
```

Learn from second example: Global Routing


Step 8 set up tracing:

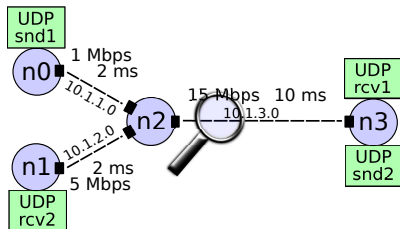

```
AsciiTraceHelper ascii;  
p2p.EnableAsciiAll (ascii.CreateFileStream  
    ("simple-global-routing.tr"));  
p2p.EnablePcapAll ("simple-global-routing");
```

Learn from second example: Global Routing


Step 9 actual simulation:

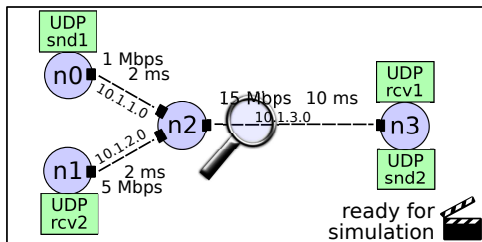

```
NS_LOG_INFO ("Run Simulation.");  
Simulator::Stop (Seconds (12));  
Simulator::Run ();  
NS_LOG_INFO ("Done.");  
Simulator::Destroy ();  
return 0;
```


Demo on Global Routing

Pcap analysis of Global Routing example with Wireshark:

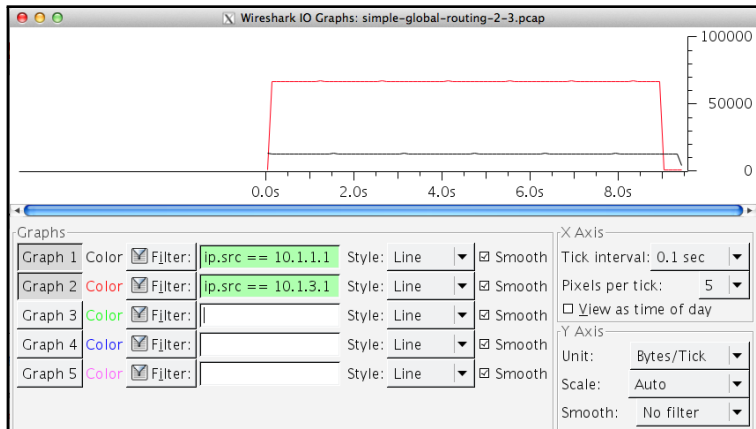

Exam Proposals about ns3

- MultiPath-TCP
- TCP variants (like Cubic, default linux TCP)
- Performance measurements
- Narrow time measurement
- Cross-layer message passing
- User mobility study

- ns3 web site: <http://www.nsnam.org>
- Developer mailing list:
<http://mailman.isi.edu/mailman/listinfo/ns-developers>
- User mailing list: <http://groups.google.com/group/ns-3-users>
- Tutorial: <http://www.nsnam.org/docs/tutorial/tutorial.html>
- Code server: <http://code.nsnam.org>
- Wiki: http://www.nsnam.org/wiki/index.php/Main_Page



UNIVERSITÀ DEGLI STUDI
DI MODENA E REGGIO EMILIA

carloaugusto.grazia@unimore.it